



- 2,5" sandwich voice coil fiberglass former and aluminium winding
- Progressive wave spider
- Cloth surround with DAR technology
- Cone waterproof treatment
- Ventilated neodymium magnet and voice coil to reduce power compression
- 95.3 dB sensitivity




| Specifications | |
|-----------------------------------------|-------------|
| Nominal Diameter | 210mm (8") |
| Nominal Impedance | 4Ω |
| Rated Power AES ⁽¹⁾ | 250W |
| Continuous Program Power ⁽²⁾ | 500W |
| Sensitivity @ 1W/1m ⁽³⁾ | 95.3dB |
| Voice Coil Diameter | 65mm (2,5") |
| Voice Coil Winding Depth | 13mm |
| Magnetic Gap Depth | 8mm |
| Flux Density | 1.14T |
| Magnet Weight | 220g |
| Net Weight | 1.8kg |

| Thiele & Small Parameters ⁽⁴⁾ | | | |
|------------------------------------------|----------|----------------------|----------------------|
| Re | 3.65Ω | Fs | 83.2Hz |
| Qms | 3.77 | Qes | 0.31 |
| Qts | 0.29 | Mms | 22.4g |
| Cms | 164μm/N | Bxl | 11.66Tm |
| Vas | 10.6l | Sd | 213.8cm ² |
| X max ⁽⁵⁾ | +/-3.9mm | X var ⁽⁶⁾ | +/-6.5mm |
| η ₀ | 1.87% | Le (1kHz) | 0.44mH |

| Constructive Characteristics | |
|------------------------------|--------------------------------|
| Magnet | : Neodymium |
| Basket Material | : Aluminium Die-Cast |
| Voice Coil Winding Material | : Aluminium |
| Voice Coil Former Material | : Fiberglass |
| Cone Material | : Paper |
| Cone Treatment | : Surface Waterproof Treatment |
| Surround Material | : Treated Cloth |
| Dust Dome Material | : Solid Paper |

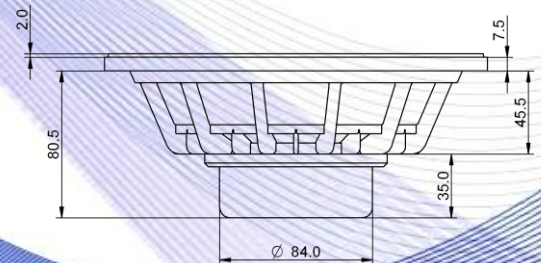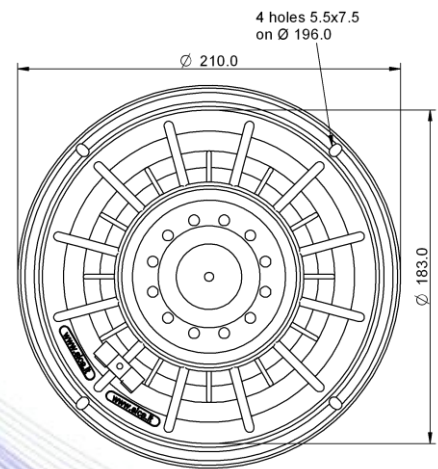

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

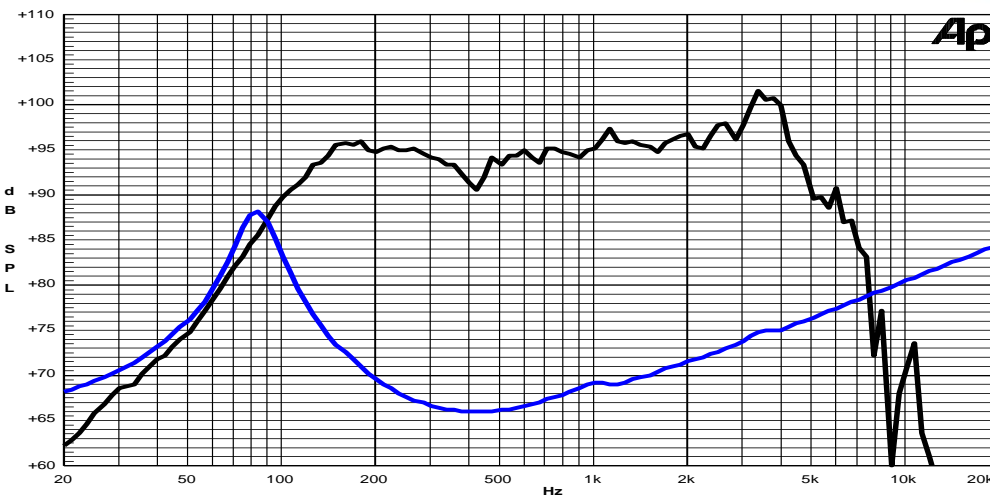

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle